


Technical Documentation

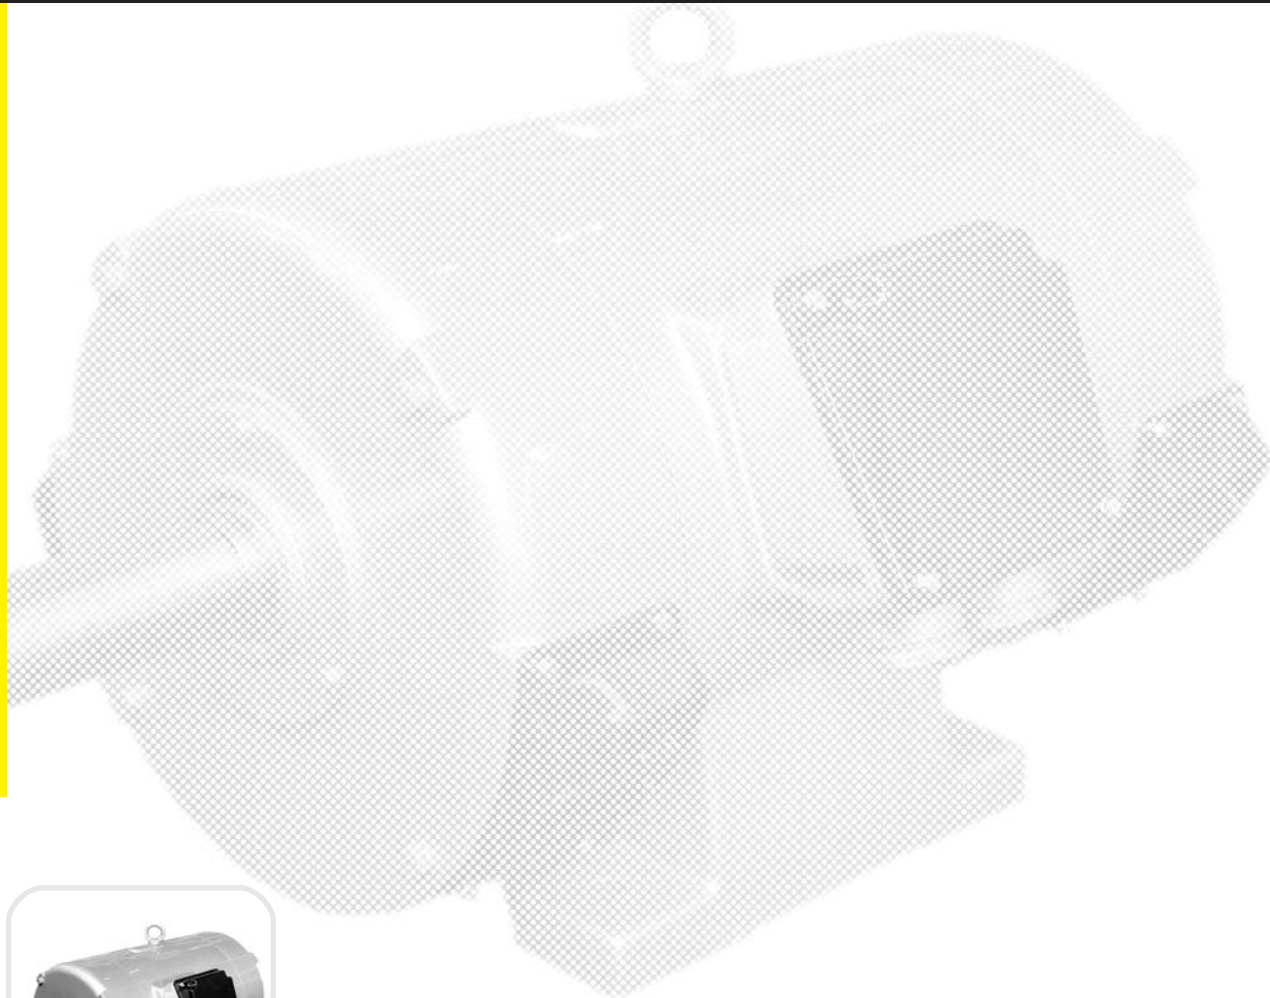

DRIP-PROOF ELECTRIC MOTORS
type OK

OK09EN

Vision



We set your ideas in motion. We do not merely manufacture motors, but instead turn the ambitious concepts of our customers into modern, innovative and reliable products, which are unique and point the way to the future. We bring our customers closer to their goals with reliability, creativity and flexibility.

Business Units




Serial Motors



New Businesses



Home Appliances



Project Motors

Type	P _N kW	n min ⁻¹	h %	cos φ	I _N A	M _m Nm	I _p /I _N	M _p /M _N	M _m /M _N	RC	J kgm ²	Mass kg
------	----------------------	------------------------	--------	-------	---------------------	----------------------	--------------------------------	--------------------------------	--------------------------------	----	-----------------------	------------


n=3000min ⁻¹												
OK 160 Mk-2	11	2870	84,0	0,85	22,8	37	4,9	2,2	2,5	16	0,025	100
OK 160 M-2	15	2890	87,0	0,86	29,0	50	5,8	2,3	2,6	16	0,033	110
OK 160 Lk-2	18,5	2900	88,0	0,87	35,0	61	6,3	2,7	2,7	16	0,044	135
OK 160 L-2	22	2915	90,0	0,87	40,6	72	6,5	2,8	2,8	16	0,052	145
OK 180 M-2	30	2915	87,5	0,86	57,5	98	5,5	2,3	2,8	13	0,080	163
OK 180 L-2	37	2925	89,0	0,87	69,0	121	6,2	2,3	2,7	13	0,103	185
OK 200 M-2	45	2930	90,0	0,86	84,0	146	6,2	2,7	3,0	13	0,154	250
OK 200 L-2	55	2940	91,0	0,87	100,0	178	8,5	3,4	3,5	13	0,193	275
OK 225 M-2	75	2946	91,0	0,89	134,0	243	6,8	2,1	3,0	13	0,300	350
OK 250 S-2	90	2935	91,0	0,87	164,0	293	5,5	2,3	2,5	13	0,471	450
OK 250 M-2	110	2935	91,0	0,87	201,0	358	5,2	2,3	2,5	13	0,565	500
OK 280 M-2	132	2957	92,5	0,89	231,0	426	7,3	2,2	3,1	13	0,846	620
OK 315 S-2	160	2955	93,0	0,89	279,0	517	7,3	2,1	3,0	10	1,309	800
OK 315 M-2	200	2961	92,5	0,86	363,0	645	6,7	2,2	3,0	10	1,636	890
OK 315 Md-2	250	2956	94,0	0,87	441,0	807	5,9	2,0	2,9	10	1,854	1010
OK 355 S-2	315	2972	94,0	0,88	550,0	1052	7,6	2,0	2,2	10	2,263	1300
OK 355 M-2	355	2972	94,3	0,88	618,0	1140	7,6	2,0	2,2	10	2,550	1430
OK 355 Md-2	400	2970	94,5	0,87	700,0	1290	7,7	1,9	2,2	10	2,874	1610

n=1500min ⁻¹												
OK 160 M-4	11	1460	87,0	0,80	23,0	72	5,0	2,0	2,4	16	0,047	110
OK 160 Lk-4	15	1452	87,5	0,80	31,0	99	5,4	2,3	2,5	16	0,063	130
OK 160 L-4	18,5	1460	88,5	0,80	38,0	121	5,3	2,2	2,3	16	0,075	140
OK 180 M-4	22	1460	88,0	0,82	44,0	144	5,7	2,7	2,2	16	0,155	180
OK 180 L-4	30	1463	89,0	0,81	60,0	196	6,3	3,5	3,1	16	0,212	217
OK 200 M-4	37	1465	90,0	0,82	73,0	241	4,7	2,1	2,1	13	0,270	270
OK 200 L-4	45	1465	90,0	0,80	90,3	293	4,9	2,1	2,1	13	0,330	285
OK 225 M-4	55	1480	92,5	0,84	102,0	355	7,2	2,6	2,8	13	0,529	375
OK 250 S-4	75	1474	90,0	0,83	144,0	486	5,6	2,1	2,6	13	0,705	450
OK 250 M-4	90	1475	91,0	0,81	176,0	583	5,7	2,5	2,7	13	0,845	560
OK 280 S-4	110	1478	92,0	0,88	196,0	711	6,1	2,1	2,5	13	1,145	600
OK 280 M-4	132	1478	92,5	0,88	234,0	853	6,0	2,1	2,5	13	1,418	630
OK 315 S-4	160	1478	93,2	0,89	279,0	1034	6,4	2,0	2,7	10	1,940	838
OK 315 M-4	200	1478	93,1	0,88	350,0	1292	6,1	1,8	2,5	10	2,304	925
OK 315 Md-4	250	1480	93,7	0,89	433,0	1613	6,0	2,0	2,7	10	2,700	925
OK 355 S-4	315	1485	94,5	0,88	547,0	2025	5,4	1,8	2,5	10	4,334	1350
OK 355 M-4	355	1485	94,7	0,88	615,0	2283	5,4	1,8	2,4	10	5,345	1480
OK 355 Md-4	400	1486	94,9	0,87	700,0	2570	5,6	1,8	2,5	10	6,025	1660

Type	P _N kW	n min ⁻¹	h %	cos φ	I _N A	M _m Nm	I _p /I _N	M _p /M _N	M _m /M _N	RC	J kgm ²	Mass kg
------	----------------------	------------------------	--------	-------	---------------------	----------------------	--------------------------------	--------------------------------	--------------------------------	----	-----------------------	------------

n=1000min ⁻¹												
OK 160 M-6	7,5	955	84,0	0,81	15,9	75	5,3	2,0	2,7	13	0,069	110
OK 160 L-6	11	960	86,0	0,79	23,4	109	6,1	2,5	3,2	13	0,092	140
OK 180 M-6	15	970	87,0	0,79	31,5	148	5,1	1,7	2,5	13	0,155	180
OK 180 L-6	18,5	972	88,5	0,80	37,7	182	6,1	1,9	2,9	13	0,212	220
OK 200 M-6	22	982	87,5	0,82	44,5	214	5,6	1,8	2,6	13	0,423	280
OK 200 L-6	30	982	88,5	0,82	59,7	292	5,8	1,9	2,6	13	0,517	300
OK 225 M-6	37	977	90,0	0,80	74,0	361	4,4	1,9	2,3	13	0,793	390
OK 250 S-6	45	982	91,0	0,86	83,0	437	6,3	2,2	2,7	13	1,091	450
OK 250 M-6	55	985	91,5	0,88	99,0	533	6,3	2,1	2,3	13	1,309	560
OK 280 S-6	75	982	91,0	0,81	147,0	729	5,6	1,8	2,8	13	1,698	610
OK 280 M-6	90	984	92,0	0,81	174,0	873	6,3	1,9	2,9	13	2,102	650
OK 315 S-6	110	981	92,5	0,83	207,0	1070	5,6	2,4	2,6	13	3,470	900
OK 315 M-6	132	981	93,0	0,83	247,0	1285	5,5	2,4	2,6	13	4,164	1020
OK 355 Sk-6	160	985	93,5	0,85	290,0	1551	5,4	1,6	2,2	13	6,595	1250
OK 355 S-6	200	986	93,5	0,86	360,0	1937	5,1	1,7	2,2	13	7,914	1320
OK 355 M-6	250	989	94,0	0,86	446,0	2414	4,9	1,4	2,4	13	10,312	1450
OK 355 Md-6	315	987	94,0	0,89	544,0	3048	6,4	2,4	2,4	13	12,231	1630


n=750min ⁻¹												
OK 160 Mk-8	4	710	79,0	0,70	10,4	54	4,0	1,7	2,4	10	0,052	110
OK 160 M-8	5,5	708	81,0	0,72	13,6	74	4,1	1,7	2,4	10	0,069	130
OK 160 L-8	7,5	710	82,0	0,72	18,4	101	4,2	1,8	2,4	10	0,092	150
OK 180 M-8	11	723	84,0	0,71	26,6	145	4,1	1,4	2,2	10	0,154	180
OK 180 L-8	15	722	87,0	0,69	36,0	198	4,4	1,6	2,4	10	0,215	200
OK 200 M-8	18,5	725	88,0	0,73	41,6	244	4,0	1,5	2,0	13	0,423	280
OK 200 L-8	22	725	88,0	0,73	49,5	290	4,0	1,5	2,1	13	0,518	290
OK 225 M-8	30	732	89,0	0,76	64,0	391	4,6	1,7	2,2	13	0,793	360
OK 250 S-8	37	732	90,0	0,75	79,0	483	4,9	1,9	2,3	13	1,091	470
OK 250 M-8	45	732	90,5	0,75	96,0	587	4,8	1,8	2,3	13	1,309	510
OK 280 S-8	55	733	90,5	0,76	115,0	717	4,6	1,5	2,1	13	1,698	600
OK 280 M-8	75	733	91,0	0,77	155,0	977	4,5	1,5	2,0	13	2,102	670
OK 315 S-8	90	736	92,0	0,79	178,0	1168	5,3	1,8	2,9	13	4,478	860
OK 315 M-8	110	736	93,5	0,80	212,0	1427	6,4	1,8	3,0	13	5,200	1000
OK 355 Sk-8	132	736	93,2	0,80	254,0	1712	4,9	1,6	2,2	13	8,279	1330
OK 355 S-8	160	742	93,7	0,77	321,0	2059	4,3	1,7	2,7	13	9,935	1400
OK 355 M-8	200	741	93,8	0,77	396,0	2577	4,4	1,8	2,2	13	11,866	1510
OK 355 Md-8	250	741	94,4	0,79	484,0	3222	4,7	2,4	2,6	13	14,074	1690

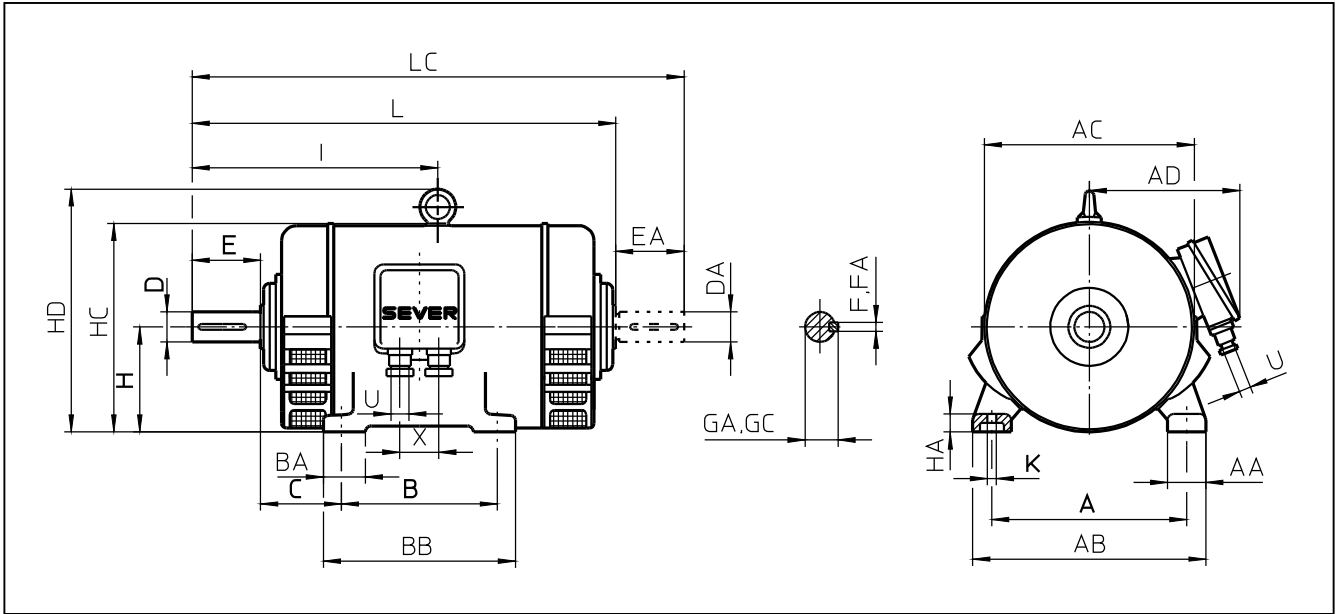

All dimensions in millimeters.

Type	Numb of poles	A	AA	AB	AC	AD	B	BA	BB	C	D	DA	E	EA	F	GA	H	HA	HC	HD	I	K	L	LC	U	X	
OK 160	M;Mk	254	60	314	306	293	210	67	260	108	48	48	110	110	14	51,5	160	25	320	382	388	15	662	772	Au 36x27	70	
	L;Lk						254														304		413,5	713			823
OK 180	M	279	70	349	352	288	241	82	296	121	55	55	110	110	16	59	180	30	360	422	415	15	720	830	Au 36x27	70	
	L						279														334		435	760			870
OK 200	M	318	80	398	394	317	267	95	337	133	60	60	140	140	18	64	200	35	396	458	473,5	19	801	946	Au 36x27	70	
	L						305														375		493,5	839			984
OK 225	M	2	356	90	446	436	340	311	110	380	149	60	60	140	140	18	64	225	40	444	506	515	19	889	1029	Au 36x27	70
	4;6;8	65										65	69														
OK 250	S	2	406	110	446	482	362	311	120	392	168	65	65	140	140	18	69	250	40	492	563	532	24	922	1062	Au 36x27	70
	4;6;8	75										75	20			79,5											
OK 250	M	2	406	110	506	482	362	349	120	430	168	65	65	140	140	18	69	250	40	492	563	550	24	958	1098	Au 36x27	70
	4;6;8	75										75	20			79,5											
OK 280	S	4;6;8	457	110	567	542	424	368	135	450	190	80	80	170	170	22	85	280	45	554	644	598	24	1024	1196	Au 42x42	80
	M	2										65	65			140	140										
OK 280	M	4;6;8	457	110	567	542	424	419	135	500	190	80	80	170	170	22	85	280	45	554	644	620,5	24	1069	1241	Au 42x42	80
	S	2										70	70			140	140										
OK 315	S	4;6;8	508	125	633	604	462	406	150	500	216	70	70	140	140	20	74,5	315	50	620	710	638	28	1103	1275	Au 42x42	80
	M;Md	2										90	90			170	170										
OK 315	M;Md	4;6;8	508	125	633	604	462	457	150	550	216	90	90	170	170	25	95	315	50	620	710	668	28	1163	1335	Au 42x42	80
	S;Sk	2										75	75			140	140										
OK 355	S;Sk	4;6;8	610	140	750	684	574	500	140	600	254	100	100	210	210	28	106	355	50	706	834	794	28	1375	1585	Double cable inlet	70
	M;Md	2										75	75			140	140										
OK 355	M;Md	4;6;8	610	140	750	684	574	560	140	660	254	100	100	210	210	28	106	355	50	706	834	824	28	1435	1645	Double cable inlet	70


The fixing dimensions given in thick figures are obligatory according to the recommendations of IEC. All the other technical data and dimensions of the motors type OK may undergo some changes during the further development of these motors and therefore they can be considered as obligatory after our confirmation only.

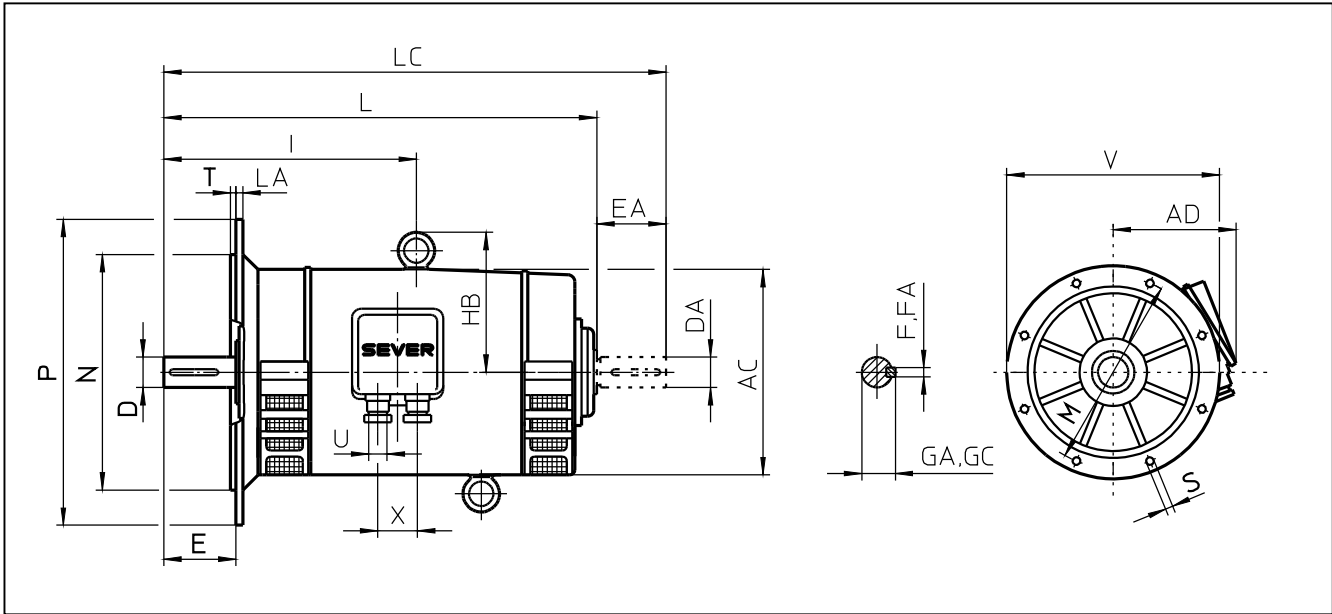

All dimensions in millimeters.

Type	Numb of poles	Flange designation	AC	AD	D	DA	E	EA	F FA	GA GC	HB	I	L	LA	LC	M	N	P	S	Num of holes	T	V	U	X
OK 160	M;Mk	F 300-I	306	293	48	48	110	110	14	51,5	221	388	662	13	772	300	250	350	18	8	5	468	Au 36x27	70
	L;Lk				48	110	14	51,5	221	413,5	713	823												
OK 180	M	F 400-I	352	288	55	55	110	110	16	59	242	415	720	22	830	400	350	450	19	8	5	513	Au 36x27	70
	L				55	110	16	59	242	435	760	870												
OK 200	M	F 500-I	394	317	60	60	140	140	18	64	262	473,5	801	22	946	500	450	550	19	8	5	592	Au 36x27	70
	L				60	140	18	64	262	493,5	839	984												
OK 225	M	F 500-I	436	340	60	60	140	140	18	64	287	515	889	22	1029	500	450	550	19	8	5	615	Au 36x27	70
	4;6;8				65	65	140	140	18	69	287	515	889	22	1029									
OK 250	S	F 600-I	482	362	65	65	140	140	18	69	321	532	922	25	1062	600	550	660	24	8	6	692	Au 36x27	70
					4;6;8	75	75	140	140	20	79,5	321	532	922	25									
	M	F 600-I	482	362	65	65	140	140	18	69	321	550	958	25	1098	600	550	660	24	8	6	692	Au 36x27	70

The fixing dimensions given in thick figures are obligatory according to the recommendations of IEC. All the other technical data and dimensions of the motors type OK may undergo some changes during the further development of these motors and therefore they can be considered as obligatory after our confirmation only.

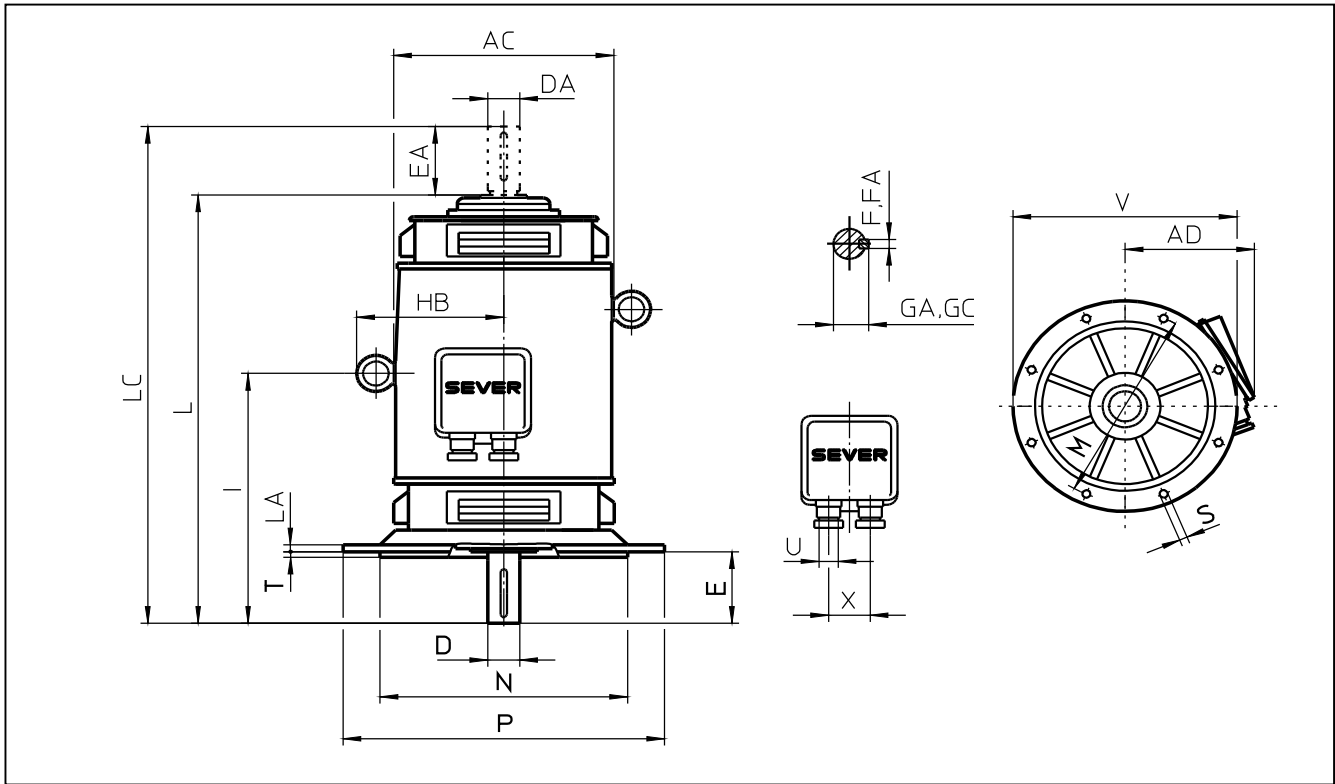

All dimensions in millimeters.

Type	Numb of poles	Flange designation	AC	AD	D	DA	E	EA	F FA	GA GC	HB	I	L	LA	LC	M	N	P	S	Num of holes	T	V	U	X
OK 160 M;Mk L;Lk	2;4;6;8	F 300-I	306	293	48	48	110	110	14	51,5	221	388	662	13	772	300	250	350	18	8	5	468	Au 36x27	70
												413,5	713	823										
OK 180 M L	2;4;6;8	F 400-I	352	288	55	55	110	110	16	59	242	415	720	22	830	400	350	450	19	8	5	513	Au 36x27	70
												435	760	870										
OK 200 M L	2;4;6;8	F 500-I	394	317	60	60	140	140	18	64	262	473,5	801	22	946	500	450	550	19	8	5	592	Au 36x27	70
												493,5	839	984										
OK 225 M	2	F 500-I	436	340	60	60	140	140	18	64	287	515	889	22	1029	500	450	550	19	8	5	615	Au 36x27	70
	4;6;8				65	65																		
OK 250 S M	2	F 600-I	482	362	65	65	140	140	18	69	321	532	922	25	1062	600	550	660	24	8	6	692	Au 36x27	70
	4;6;8				75	75																		
OK 250 M	2	F 600-I	482	362	65	65	140	140	18	69	321	550	958	25	1098	600	550	660	24	8	6	692	Au 36x27	70
	4;6;8				75	75																		
OK 280 S M	2	F 600-I	542	424	80	80	170	170	22	85	364	598	1024	25	1196	600	550	660	24	8	6	754	Au 42x42	80
	4;6;8				65	65																		
OK 280 M	2	F 600-I	542	424	80	80	170	170	22	85	364	590,5	1039	25	1181	600	550	660	24	8	6	754	Au 42x42	80
	4;6;8				620,5	1069						1241												
OK 315 S	2	F 600-I	604	462	70	70	140	140	20	74,5	395	608	1073	25	1215	740	680	800	24	8	6	862	Au 42x42	80
	4;6;8				90	90																		
OK 315 M;Md	2	F 740-I	604	462	70	70	140	140	20	74,5	395	638	1133	25	1275	740	680	800	24	8	6	862	Au 42x42	80
	4;6;8				90	90																		
OK 355 S;Sk	2	F 740-I	684	574	75	75	140	140	20	79,5	479	724	1305	25	1445	740	680	800	24	8	6	974	Double cable inlet	70
	4;6;8				100	100																		
OK 355 M;Md	2	F 740-I	684	574	75	75	140	140	20	79,5	479	754	1365	25	1505	740	680	800	24	8	6	974	Double cable inlet	70
	4;6;8				100	100																		

The fixing dimensions given in thick figures are obligatory according to the recommendations of IEC. All the other technical data and dimensions of the motors type OK may undergo some changes during the further development of these motors and therefore they can be considered as obligatory after our confirmation only.

SELECTION OF BEARINGS FOR OPEN CAGE MOTORS

Type	Numb of poles	Horizontal shaft		Vertical shaft		Quantity of grease (gr)	Time of	
		D-end	No D-end	D-end	No D-end		Number of poles 2	4, 6, 8
OK 160	2,4,6,8	6310 C3	6310 C3	6310 C3	6310 C3	31	10 000	20 000
OK 180	2,4,6,8	6312 C3	6312 C3	6312 C3	6312 C3	40	10 000	20 000
OK 200	2,4,6,8	6313 C3	6313 C3	6313 C3	6313 C3	47	10 000	20 000
OK 225	2,4,6,8	6314 C3	6314 C3	6314 C3	6314 C3	27	2 500	5 900
OK 250	2,4,6,8	6316 C3	6316 C3	6316 C3	6316 C3	31	2 100	5 700
OK 280	2,4,6,8	6317 C3	6317 C3	6317 C3	6317 C3	37	1 900	5 200
OK 315	2,4,6,8	6319 C3	6319 C3	6319 C3	7319 B	45	1 700	5 200
OK 355	2	6319 C3	6319 C3	6319 C3	7319 B	45	1 700	
	4,6,8	6322 C3	6322 C3	6322 C3	7322 B	60		4350

QUESTIONNAIRE FOR THE OFFER OF ASYNCHRONOUS ELECTRIC MOTORS



Enquiry Number: _____

Customer: _____ ITEM: _____
Qty: _____

A MOTOR DATA

1 Motor type: Three phase: _____ Single phase: _____

2 Rotor type: Squirrel cage: _____ Slip-ring: _____

3 Rated output: $P_N =$ _____ kW

4 Rated voltage: $U_N =$ _____ V Connect: Star _____ Delta _____

5 Rated frequency: $f_N =$ _____ Hz

6 Rated speed: $n_N =$ _____ rpm

7 Insulation class: F B

8 Duty type: S1 S2 S3 S4 S5 S6 S7 S8 S9 S10
ED %

--	--	--	--	--	--	--	--	--	--	--

starts /h _____ min _____ J_{mot} _____ kgm²

9 Standard: _____ IEC or _____

10 Cooling method: _____ IC

11 Mounting arrangement: IM

12 Protection degree: Motor IP: _____ Terminal box IP: _____

13 *Sense of rotation: Left _____ Right _____ Both _____

14 Motor brake: yes no
Braking moment: _____ Nm
Brake voltage: _____ V/Hz _____ V,DC

15 No-load regime? (single phase motor) yes _____ no _____

16 Rotor data: $U_{2c} =$ _____ V $I_{2n} =$ _____ A

B DATA ABOUT THE DRIVEN MACHINE

1 Type: _____

2 Required power: _____

3 Required speed: _____

4 Load torque characteristic:
Constant: _____ Squared _____ or _____
Speed %:

0	25	50	75	100
---	----	----	----	-----

Torque Nm:

--	--	--	--	--

5 Moment of inertia: $J =$ _____ kgm²

6 Running machine special data: _____

C AMBIENT CONDITIONS

1 Ambient temperature: _____ C

2 Relative humidity: _____ %

3 Altitude [above sea level]: _____ m

4 Specific ambient conditions: _____

D POWER TRANSMISSION AND STARTING CONDITIONS

1 Coupling type: _____

2 Starting: _____

3 Number of consecutive startings:
Hot state: _____ Cold state: _____
_____ per hour _____ per hour
_____ per day _____ per day

E ADDITIONAL REQUESTS FOR MOTOR EXECUTION

1 Overloading from: _____ % P_N
Duration: _____ min

2 Temperature rise: F B

3 Request for: vibration level _____ mm/s
noise level _____ db

4 *Terminal box position:
left right On top

5 Additional shaft loading sense
axial force _____ radial force _____

6 Converter feed operation: yes no
Converter type: _____
Manufacturer: _____
Speed range: from _____ to _____ rpm

7 Sensor category (mark in lower field):
Taho gen. _____ Encoder _____ Absolute _____ Resolver _____
Sensor Type: _____

8 Flange size: _____ mm

9 Second shaft end: yes no
DA= _____ mm EA= _____ mm

10 Other requests and limits: _____

F ADDITIONAL EQUIPMENT, SPARE PARTS AND DOCUMENTATION

1 Thermal protection: yes no
Type: _____

2 Bearings thermometers yes no

3 Anti-condensation heaters yes no

4 Spare parts yes no

5 Guarantee sheet yes no

6 Language of instruction list: _____

7 Other requests for packing: _____

You are kindly requested to provide us with as much data as possible thus enabling us to offer satisfactorily

H CUSTOMER

1 Company: _____

2 Address: _____

3 City: _____

4 Country: _____

5 Person: _____

6 Telefon / Telefax: _____

7 e-mail: _____

Company locations

HEAD OFFICE AUSTRIA

ATB Austria Antriebstechnik AG

Renngasse 6-8
1010 Wien, Austria

T: +43 1 90 250 - 0
F: +43 1 90 250 110

info@atb-motors.com
www.atb-motors.com

AUSTRIA

ATB Motorenwerke GmbH

G.-Bauknecht-Str. 1
8724 Spielberg
T: +43 3577 757-323
F: +43 3577 757-182
info@atb-motors.com

ATB Technologies GmbH

Millenium Park 11
6890 Lustenau
T: +43 5577 9010-0
F: +43 5577 9010-110
info@atb-motors.com

ASIA

ATB Motorentechnik GmbH

141 Market Street,
07-01 International Factors
Building
Singapore 048944
T: +65 63721174
F: +65 62253524
dennis.tan@atbs.com.sg

BAHREIN

ATB Austria Antriebstechnik Aktiengesellschaft, Rep. Office Bahrain

Almoayyed Tower
21st Floor c/o Regus
Seef District, Manama
Kingdom of Bahrain
T: +973 175 68 160
F: +973 175 67 901

BENELUX

ATB BeNeLux B.V.

Tasveld 14
8271 RW IJsselmuiden
T: +31 38 443 2110
F: +31 38 443 2111
verkoop@nl.atb-motors.com

GERMANY

ATB Antriebstechnik GmbH

Silcherstraße 74
73642 Welzheim
T: +49 7182 14-535
F: +49 7182 14 590
info@de.atb-motors.com

ATB Motorentechnik GmbH

Helgoländer Damm 75
26954 Nordenham
T: +49 4731 365-0
F: +49 4731 365-159
info@de.atb-motors.com

Schorch Elektrische Maschinen und Antriebe GmbH

Breite Straße 131
41238 Mönchengladbach
T: +49 2166 925-0
T: +49 2166 925-100
mail@schorch.de

POLAND

Fabryka Silników Elektrycznych Tamel S.A.

ul. Elektryczna 6
33 100 Tarnow
T: +48 14 632 11 00
F: +48 14 632 11 02
officetamel@tamel.pl

RUSSIA

ATB Rus 000

Petrovka ul. 27
107031 Moscow
T: +7 495 95 66 326
vyacheslav.mikheyev@tecindustries.com

SERBIA

ATB SEVER D00 SUBOTICA

Magnetna polja 6
24000 Subotica
T: +381 24 665 100
F: +381 24 546 893
sever@rs.atb-motors.com

ATB FOD d.o.o.

Dorda Vajfert 16
19210 Bor
T: +381 30 423 147
fod@fod.co.rs

SWITZERLAND

ATB Schweiz AG

Industriestraße 28
5600 Lenzburg
T: +41 62 885 70-10
info@ch.atb-motors.com

UK & IRELAND

ATB Laurence Scott Ltd.

PO Box 25 Hardy Road, Norwich NR1 1JD
Norfolk
T: +44 1603 628 333
hvm.sales@laurence-scott.com

ATB Morley Limited

Bradford Road
Leeds LS28 6QA
West Yorkshire
T: +44 113 257 1734
sales@uk.atb-motors.com

Brook Crompton UK

St. Thomas Road, Huddersfield HD1 3LJ
West Yorkshire
T: +44 1484557200
F: +44 1484557201
csc@brookcrompton.com

CANADA

Brook Crompton

North America
264 Attwell Drive
M9W 5B2 Toronto, Ontario
T: +1 416 675-3844
ramzi.mallouk@brookcromptonna.com

ATB SEVER D00

Magnetna polja 6

24 000 Subotica

Serbia

Tel. +381 24 665-124

Fax +381 24 665-125

www.wolong-electric.com, www.atb-motors.com, www.sever.rs
sever@atb.wolong.com

